# **INSTALLATION GUIDE**


2013-2019 UTILITY INTERCEPTOR CARGO SECURITY COVER-STAND ALONE CSC4713S



STRONG. RELIABLE. SECURE.

pro-gard.com 800.480.6680

#### THESE COMPONENTS ARE REQUIRED TO INSTALL THE OUTBOARD SEATBELTS

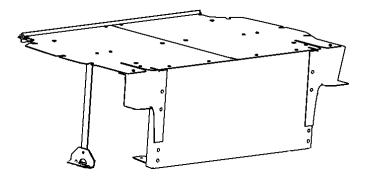



Part #4CSCHK4713S-01

Stand Alone Cargo Security Cover System Part #4CSC4713S

# I. The following tools will be required to complete the installation

- A. 7/16, & 13mm Sockets
- B. 15mm Deep Well Socket
- C. Phillips Screwdriver


### II. Read all instructions and refer to last page to ensure all parts were received

**PQVG** It may be helpful to assemble fasteners loosely to allow for part alignment, then tighten fully after all parts are assembled.

**YCTPIPI <** Locate All wiring, fuel lines, brake lines, coolant lines, or refrigerant lines before drilling any holes or installing any self-drilling fasteners.


## III. Rear Mounting Bracket Installation

- A. Remove the lower trim piece from the driver's side interior cargo panel (located at the rear quarter).
  Loosen the two 15mm OEM bolts that secure the cross member bracket.
- B. Place the driver's side rear mounting bracket (3B4713-02D) under the two bolts (FIG. 1) and slide the bracket in as far as it will go.. Retighten the 15mm bolts.
- C. Repeat for passenger side using passenger side rear bracket (3B4713-02P).




### **IV. Front Mounting Bracket Installation**

- A. Locate the two bolts that secure the load flor to the vehicle, remove the OEM bolt, and leave the OEM spacer in the load floor. Install the (4G5070P11) black spacer that is supplied with the hardware kit. Place the front mounting bracket (3B4713-01D) on top of the load floor and use the supplied bolt (3X155) and lock washer (3X194) to secure the bracket.
- B. Repeat for the passenger side using the passenger side front mounting bracket (3X4713-01P).

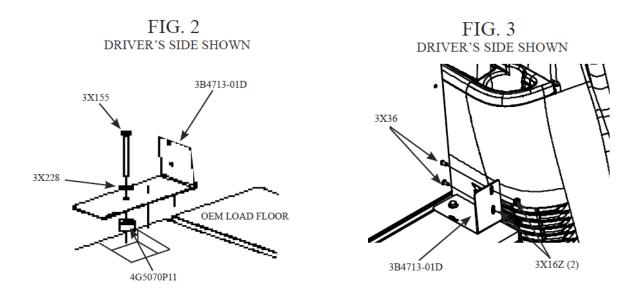


#### V. Front Main Panel Installation

- A. Place the front main panel (3CSC4716-10) on the load floor with the flat surface against the front mounting brackets, then fasten the barrier to the brackets using two (3X36) carriage bolts and two (3X16Z) whiz nuts on each side.
- B. Fasten the driver's side wing (3CSC4716-11) and passenger side wing (3CSC4716-12) to each side of the main panel using two (3X36) carriage bolts and two (3X16Z) whiz nuts on each side (FIG. 4)

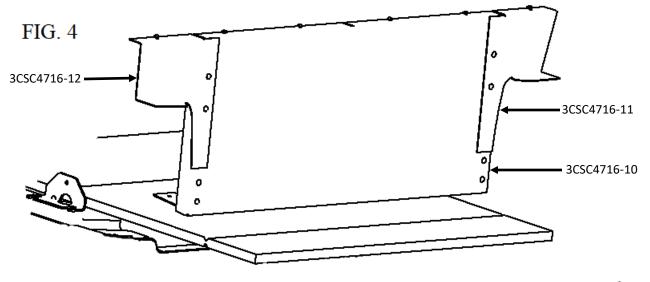

# V. Install Supporting Brackets

- A. Attach (3CSC4716-13) rear shelf support bracket to the inside surface of the (3B4713-02P) rear mounting bracket using (3X36) carriage bolt and (3X16Z) whiz nut. Repeat operation for the driver's side bracket. E
- B. Attach a (2CSC4716-03) shelf support bracket to each side in place of the rear cargo hooks using (3X110) self-drilling screw.
- C. Place the (3CSC4716-04) rear cross member into place over the tops of the (2CSC4716-03) shelf support brackets.

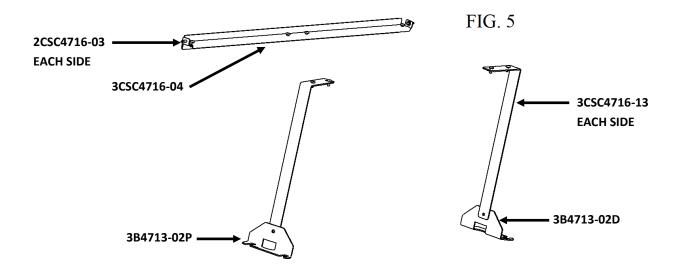

#### VI. Cargo Cover Installation

- A. Place (3CSC4716-01) cargo shelf into place over the front main panel, rear shelf support bracket, and rear cross member on the driver's side. Insert two (3X61) carriage bolts through the leading edge of the shelf and top of front main panel, and one (3X61) carriage bolt through the shelf and through the driver's side wing. Fasten the bolts with three (3X16Z) whiz nuts.
- B. Insert two (3X03) truss head Phillips screws through the cargo shelf and screw into the rear shelf support bracket. Place another two through the cargo shelf into the rear cross member and fasten. Outer cross ber screws will require a (3X16Z) whiz nut underneath.
- C. Place the (3CSC4716-02) cargo shelf in place on the passenger side, and repeat previous two operations.
- D. Fasten shelf halves together underneath using four (3X04) bolts and (3X16) whiz nuts.
- E. Place the 3CSC4716-09 rubber mat on top of the assembled cargo shelf and align with edges and remaining through holes. Insert provided (3X246) push-in nylon rivets into the holes to secure rubber mat.

## Installation complete

If you have any problems with this installation or have any questions please call (800-480-6680) and ask for technical assistance.

PUSH-IN NYLON RIVET, BLACK	30/246	6	25
NEOPRENE MAT LINT	3CSC4716-09	2	24
5/16-18 LARGE HEX WHIZ NUT-ZINC	3X165	2	23
5/16-18 X .75 HHCS GRS ZN	1X239	Z	22
BARRJER REAR MT BRKT PASS UINT	3 <b>84</b> 713-02P	1	21
BARRJER REAR MT BRKT DRI UINT	384713-02D	1	20
1/4"-14x1" SELF DRILLING SCREW	30110	2	19
1/4-20 HEX WHIZ NUT, BLK (NOT SHOWN)	3×16	4	18
1/4-20 X 5/8 HEX HD CAP SCR, BLK (NOT SHOWN)	3XD4	4	17
SHELF SUPPT BRACKET	2CSC4716-03	2	16
1/4-20 X 5/8 PHIL TRUSS HD MS	EDXE	8	15
1/4-20 X 3/4 CARRIAGE BOLT	19XE	9	14
REAR CROSS MEMBER ASSY	3C9C4716-04	1	13
CENTER SUPPORT ASSY	3CSC4716-05	2	12
UT CARGO SHELF PS	3CSC4716-02	1	11
UT CARGO SHELF DS	3CSC4716-01	1	10
1/4-20 LARGE HEX WHIZ NUT-ZINC	20102	14	6
*Varies*	30/155	4	8
SPACER, PLASTIC BLACK 5/8"	4G5070P11	Z	٤
1/4-20 X 5/8 CARRIAGE BOLT	9£XE	80	6
MNT, BARRIER FR DS UINT	384713-01D	1	U
MNT, BARRIER FR PS UINT	384713-01P	1	4
WING, UTILITY CSC DS	3CSC4716-11	1	٤
WING, UTILITY CSC PS	3C9C4716-12	1	2
PANEL, UTILITY CSCS FRONT	3C9C4716-10	1	1
DESCRIPTION	PART NUMBER	АЦЙ	JTEM
LIST	PARTS		

