


INSTALLATION GUIDE

**WSD47UINT20 WEAPON STORAGE DRAWER
ASBD47UINT20 ALUMINUM STORAGE DRAWER
2020+ FORD INTERCEPTOR UTILITY**


Pro-gard[™]
PRODUCTS LLC.

STRONG. RELIABLE. SECURE.

THESE COMPONENTS ARE REQUIRED TO INSTALL THE STORAGE DRAWER



ASBD47UINT13



WSD47UINT13



4WSK472000

I. The following tools will be required to complete the installation of the drawer storage systems in conjunction with the Pro-gard Cargo Barrier

- | | | |
|---------------------------|--------------------------|-------------------------|
| A. 7/16" Deep Well Socket | C. 15mm Deep Well Socket | E. 8mm and 18mm Sockets |
| B. 5/32" Allen Wrench | D. T55 Torx Driver | F. 1.25" Hole Saw |

II. Read all instructions and refer to last page to ensure all parts were received

Note: *This storage drawer option is to be used with the Pro-gard barrier system. Please refer to instructions included with the barrier (also available on the Pro-gard website) and install it first. Storage drawer brackets will be placed over previously installed barrier brackets.*

Warning: *Locate All wiring, fuel lines, brake lines, coolant lines, or refrigerant lines before drilling any holes or installing any self-drilling fasteners.*

III. Install Rear Support Brackets

- A. Remove the rear section of the load floor.
- B. Using an 18mm socket, remove the two OEM bolts from the rear driver's side Barrier Support Bracket [3BAR472003], lay the driver's side rear WSD Bracket [3WSD472009] over it, and reinstall the bolts removed at the beginning of this step. Torque to factory specifications.
- C. Repeat Steps A and B for the passenger side with the second Barrier Support Bracket [3BAR472005] and the passenger side rear WSD Bracket [3WSD472005].
- D. Trim the rear section of the load floor as necessary to fit around the rear Barrier Brackets/WSD Brackets and reinstall.

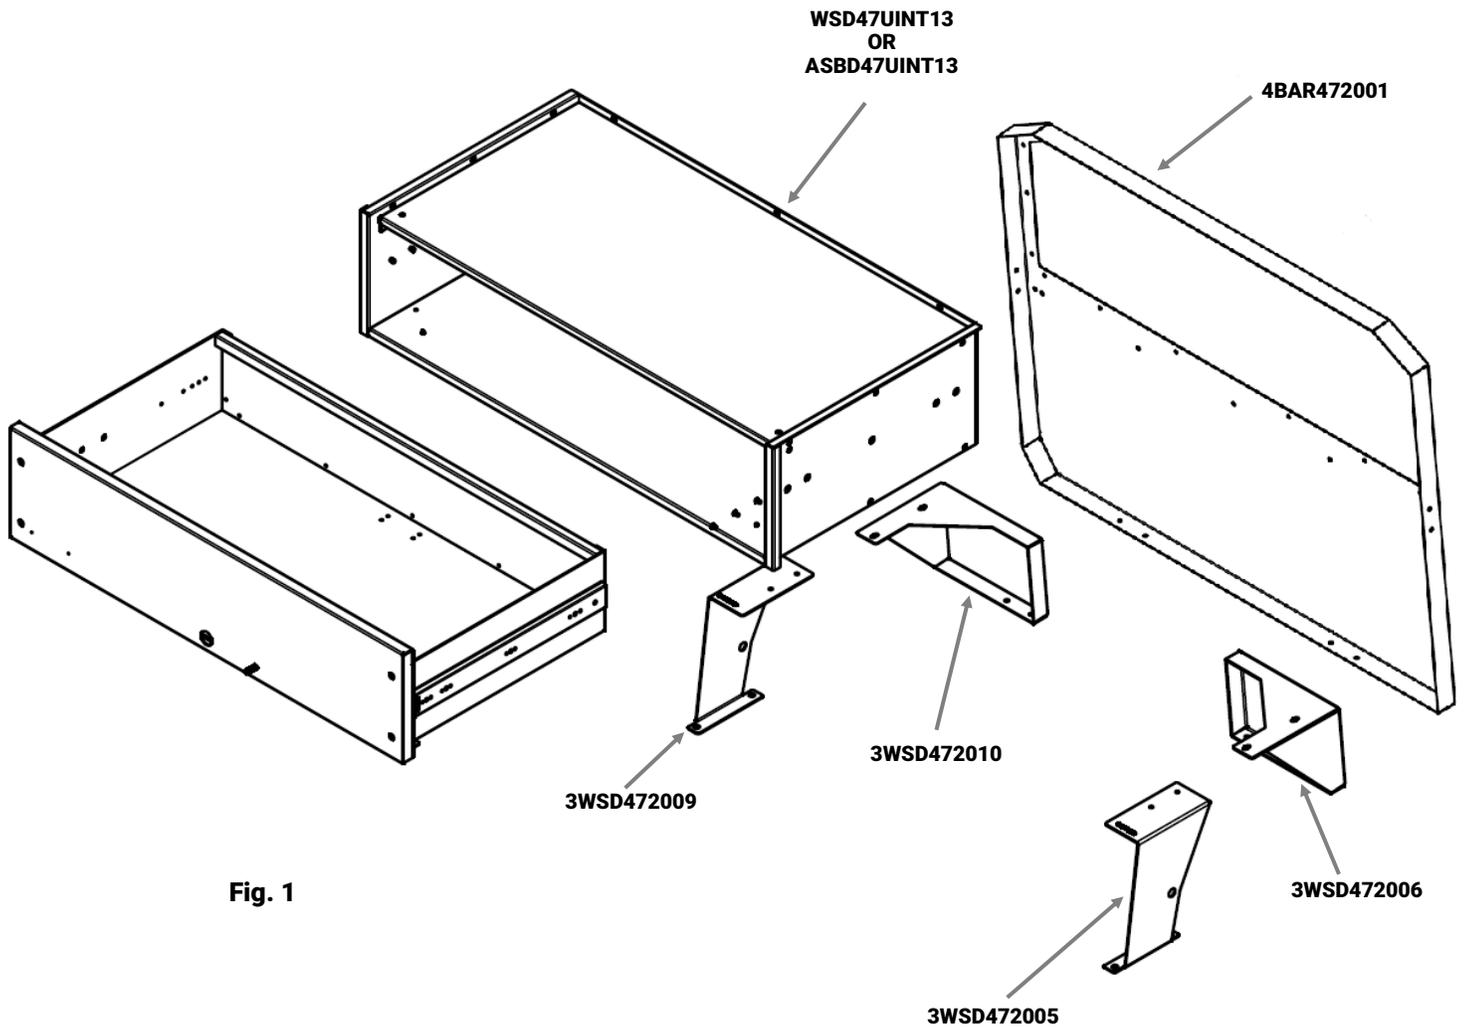


Fig. 1

IV. Install Front Brackets and Storage Drawer

- A. Use 5/32" Allen wrench to remove (2) screws from the barrier's bottom on driver's side.
- B. Place [3WSD472010] Front Driver's Side WSD Bracket over the holes left from Step A (as shown in figure 2) and re-attach using [3X75] screws. Repeat for passenger side using [3WSD472006] Front Passenger Side WSD Bracket.
- C. Remove the sliding drawer from the storage drawer unit by depressing the tabs on the slides at each end and pulling it free.
- D. Pass (8) [3X001] carriage bolts through the inside of the box and through the holes on the corresponding mounting brackets. Using a 7/16" socket, tighten (8) [3X16Z] whiz nuts on the bottom of the fasteners to affix the drawer unit to the brackets.
- E. Carefully reconnect the slides at each end of the sliding drawer and close it into the storage drawer unit. Verify that the drawer opens and closes properly.

Installation complete

If you have any problems with this installation or have any questions please call (800-480-6680) and ask for technical assistance.

4WSK472000 (Used with Pro-gard Cargo Barrier)

4WSK472000 (Used with Pro-gard Barrier)

PARTS LIST				
ITEM	QTY	PART NUMBER	REVISION NUMBER	DESCRIPTION
1	1	3WSD472009	B	WSD BRACKET, DS REAR
2	1	3WSD472005	B	WSD BRACKET, PS REAR
3	1	3WSD472006	B	WSD BRACKET, FRONT PS
4	1	3WSD472010	B	WSD BRACKET, FRONT DS
5	1	4WSK472001	A	KIT, WSD HARDWARE 2020 UTILITY
5.1	8	3X16Z		1/4-20 LARGE HEX WHIZ NUT-ZINC
5.2	8	3X001		1/4-20 X 3/4 CARRIAGE BOLT
5.3	4	3X75		5/16-18 x 1" HHMS, Zn

