


INSTALLATION GUIDE
ABS TRANSPORT SEAT &
ABS FLOOR PAN
2013- CURRENT
FORD POLICE INTERCEPTOR

Pro-gard[™]
PRODUCTS LLC.


STRONG | RELIABLE | SECURE

pro-gard.com
800.480.6680


THESE COMPONENTS ARE REQUIRED
TO INSTALL THE PRO-GARD ABS SEAT/FLOOR PAN SYSTEM

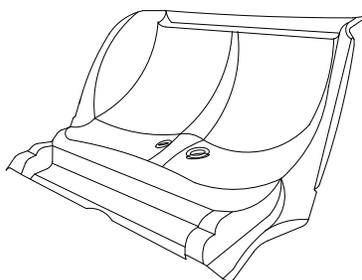

S36INT13 ABS Transport Seat



4S36INT13 Seat Kit

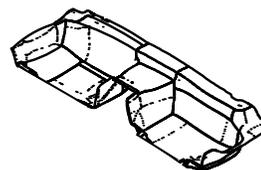

FP36INT13 ABS Floor Pan

- I. Refer to the diagram on the last page of these instructions to verify all parts were received.
- II. The following tools will be required to complete the installation.
 - A. 1/4" or 3/8" drive ratchet with 3/8", 7/16", 7mm, 13mm, and 15mm sockets
 - B. Drill with 3/8" Socket and Phillips Bit
- III. Read all instructions carefully before starting the assembly process.

Caution: Locate all Wiring, Fuel Lines, Brake Lines, and/or Cooling Lines before drilling holes or installing Fasteners.

- VI. Removing the OEM Seat
 - A. Begin by lifting the front of the lower seat cushion out from the rubber grommets in the floor. Once the front of the seat is free, shove back on the seat to free it from the wire retainers holding the rear of the seat in place. Remove the seat cushion from the vehicle.
 - B. Remove the seat belts by removing the OEM nuts from their mounting studs. Do not remove the shoulder straps anchored at each side of the vehicle.

Note: OEM Seat Belt Buckles will be reused later in this application.
 - C. Remove the OEM rear seat back cushion by removing four OEM fasteners from the lower mounting brackets near the outside of the reinforcement frame. Release the top the rear seat from its latching brackets by pulling the release cable located in the trunk.
 - D. Remove the OEM latching brackets from the rear deck face.
 - E. With the seat removed, the OEM child restraint loops are exposed. Remove the child restraint loops or bend them downward toward the floor.

Note: This is necessary for the Pro-gard Seat to fit properly in position.

VI. Installing the ABS Floor Pan

- A. Place the ABS Floor Pan in the vehicle, making sure that there are no objects underneath of it. Tuck the edges of the floor pan under the OEM B-pillar trim, the rear edges of the floor pan should be flush with the OEM scuff trim. Insure that the Floor Pan is all the way back and down against the rear seat area.

NOTE: *If using the OEM Wire Raceway; Remove the OEM Raceway, place the ABS Floor Pan into the vehicle, under the vehicle wiring. See seat installation note for Raceway installation. Alternatively, you may place the ABS floor Pan over the vehicle wiring. This should be determined by install guidelines and/or end user request.*

VII. Installing Floor Pan Drain Plugs.

- A. To install the Drain Plugs, mark the Plug location from the vehicle on to the ABS Floor Pan. Using 1 1/2" hole saw drill the Plug locations. Reinstall the ABS Floor Pan into the vehicle, then install the rubber grommet through the vehicle and ABS floor Pan.

Caution: *Locate all Wiring, Fuel Lines, Brake Lines, and/or Cooling Lines before drilling holes.*

VIII. Installing the ABS Transport Seat

A. Preparing Transport Seat for installation:

1. Using a utility knife cut the stitching securing the webbing of the center shoulder belt from the passenger side seat belt buckle assembly. Insure that the buckle assembly is still connected to the OEM mounting plate. Secure the center shoulder belt, so it will remain behind the ABS Transport seat. This same process may be completed for the Driver side seat belt buckle assembly.

NOTE: *This is an optional process making installation of the seat belt grommets and cover plates easier. You can install the grommets and cover plates without cutting or modify the OEM seat belt systems*

2. If installing a Pro-Gard Pro-Cell Kit with center divider then, go to Step 2. If not installing a center divider, skip to Step B.

3. Drill the four dimpled locations on the center line of the seat with a 5/16" drill bit. Attach the (3P214) Divider Mounting Brackets using the supplied bolts (3X36) and whiz nuts (3X16Z), before installing the seat in to the vehicle. (See Fig. 7)

- B. Install the Upper Mounting Clips (3S3611-21) on the upper C-Pillar of the vehicle just under the C-Pillar trim. Locate the Mounting Clip by placing the notch on the Clip under the OEM mounting Boss of the OEM Upper C-Pillar Trim. Secure the clip using the supplied self tapping screws (3X110). See Fig. 1 & 2

- C. If using the optional OEM Wire Raceway, the ABS Transport Seat will need to be trimmed to fit. Place the ABS Seat into the vehicle, mark clearance for OEM Wire Raceway. Using a cutoff tool, saw, or equivalent to trim seat to fit. Seat should be sanded or deburred for correct appearance.

NOTE: *The OEM Wire Raceway from Ford does not extend far enough to go into our ABS Seat. The installer will need to provide a cover for the opening between the Raceway and the ABS Seat in order to close any gap.*

D. Place the ABS Seat in the vehicle. Tip the seat to the rear, pull the shoulder belts out of the way and slide the seat back and up until the front edge is against the seat well of the vehicle. The seat will overlap the back edge of the floor pan. Insure that the Upper outside corners of the seat are behind the Upper Mounting Clips.

E. Be sure the seat belts are on the outside of the seat and operate freely.

Note: The gas tank is under the rear seat in this vehicle. Use pre-drilled locations and supplied hardware only!

Caution: Locate all Wiring, Fuel Lines, Brake Lines, and/or Cooling Lines before drilling holes or installing fasteners.

F. Ensuring that the front edge of the seat is tight against the vehicle well and the reinforcement frame secure the front lower portion of the seat to vehicle through the four recessed screw mounting locations using four 1-1/2" long (3X77) self-tapping screws and (3X78) finish washers

G. Starting at the top of the transport seat along the edge near the rear deck. Fasten with four 1-1/2" long (3X77) self-tapping screws and (3X78) finish washers through the surface on the seat where the raised Pro-Gard lettering is seen. Be sure the upper trimmed edge of the seat is parallel with the top edge of the rear deck.

IX. Installing the OEM Seat belts and ABS Cover Plates.

A. Insert the seat belts, mounting lugs first, through the rubber seat belt grommets. Pass the seat belt lug through the slot in the cover plate and install the rubber grommet into the slot of the cover plate. Slide the cover plate/grommet assembly up the belt towards the buckles.

B. Insert the OEM seat belt assemblies through the corresponding hole in the ABS Transport Seat and attach to OEM reinforcement frame mounting stud with OEM nut. Radially orient and tighten with a socket wrench. Slide cover plate and grommet assembly down the belt and into the recess in the seat. Radially orient and secure using the (3X72) Phillips truss head screws.

X. Finalize Installation

A. Audit the overall installation for fit and function of all components. Once satisfied, insure all fasteners are tight.

B. Installation is now complete.

